


ONYX



LCD Display Panel

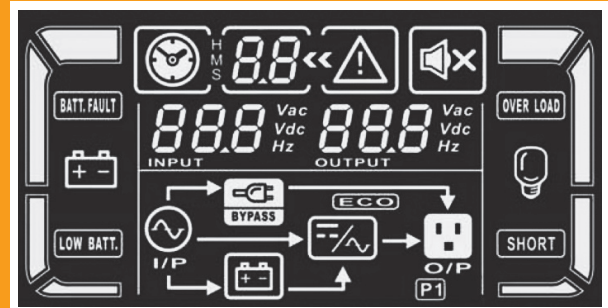

• True double-conversion

A true double conversion UPS will provide clean, high level quality power to fully protect mission-critical devices such as sensitive networks, small computer centers, servers, telecom applications, as well as for industrial applications.

• Output power factor 0.8

Compared to the online UPSs in the current market, UPS series provides better output power factor up to 0.8. It offers higher performance and efficiency for critical applications.

• Wide input voltage range (110 V - 300 V)

UPS can still provide stable power to connected devices under unstable power environments.

• Programmable power management outlets

With programmable power management outlets, users can easily and independently control load segments. During power failure, this feature enables users to extend battery time to mission-critical devices by shutting down the non-critical devices.



Programmable Outlets (P1)
- connect to non-critical devices

• 50/60 Hz Frequency Converter Mode

Lock output frequency at 50Hz or 60Hz to suit power sensitive equipments.

• ECO mode operation for energy saving

Offers efficiency as high as 97% to cut energy usage & cost. UPS power application via static bypass, timely returning to online double conversion when the need arises.

• Emergency Power Off (EPO) Function

This feature can secure the personnel and equipment in case of fires or other emergencies.

• SNMP+USB+RS-232 multiple communications

This feature allows either USB or RS-232 communication port to work with SNMP interface simultaneously.

• Smart battery charger design to optimize battery performance

- UPS 1-3K series is equipped with **2-stage charger design** to guarantee battery discharge time. Besides, it will adjust charging voltage according to outside temperature. This features will extend the useful service life of batteries.
- UPS 6K and up models are equipped with **3-stage extendable charger** for optimized battery performance. This feature extends the useful service life of batteries and optimizes battery recharge time. Besides, the extendable charger design can be stacked in numbers for large-capacity battery charging.

• Maintenance bypass available for 6K and up models

Internal bypass assures continuous power to critical devices during UPS maintenance.

• N+X parallel redundancy available for 6K and up models

UPS (6K and up models) can be used in parallel operation with up to 3 units. It increases power capacity, safety, and availability.

• Adjustable battery numbers for 6K and up models

UPS (6K and up models) can still normal operate well with only 18 or 19 internal batteries.

• Rackmount form factor available

UPS series offers rackmount form factor for space consideration. It's ideal backup power protection solution for servers, storage systems, network equipment and other critical devices.

• Active Power Factor Correction in all phases for 3 phase in/1 phase out 10KVA to 20KVA

Active PFC improves power quality and increase the energy efficiency.

External Maintenance Bypass Switch



Remote Control & Monitoring Agent



- * Ultra-compact, light and fast tool to remotely monitor and manage any UPS system
- * Supports multiple languages and web-based auto language detection.

ONYX 1K/1.5K/2K/3K/6K/10K ONLINE UPS SELECTION GUIDE

MODEL	ONYX 1K (L)	ONYX 1.5K (L)	ONYX 2K (L)	ONYX 3K (L)	ONYX 6K (L)	ONYX 10K (L)	ONYX 3/1-10K (L)	ONYX 3/1-20K (L)	
Phase	Single phase in/Single phase out						3 phase in / 1 phase out		
CAPACITY	1000 VA/800 W	1500 VA/1200 W	2000 VA/1600 W	3000 VA/2400 W	6000 VA/4800 W	10000 VA/8000 W	10000 VA/8000 W	20000 VA/16000 W	
INPUT									
Voltage Range	Low Line Transfer	160 VAC / 140 VAC / 120 VAC / 110 VAC ± 5 % 80 VAC / 70 VAC / 60 VAC / 50 VAC ± 5 % (based on load percentage 100% - 80 % / 80 % - 70 % / 70 - 60 % / 60 % - 0)			176 VAC @ 100% load 110 VAC @ 50% load		176 VAC (phase voltage)@ 100%load 110VAC (phase voltage)@ 50%load		
	Low Line Comeback	175 VAC ± 5 % or 85 VAC ± 5 %			186 VAC @ 100% load 120 VAC @ 50% load		186 VAC (phase voltage) @ 100% load 120 VAC (phase voltage) @ 50% load		
	High Line Transfer	300 VAC ± 5 % or 150 VAC ± 5 %			300 VAC		300 VAC (phase voltage)		
	High Line Comeback	290 VAC ± 5 % or 145 VAC ± 5 %			290 VAC		290 VAC (phase voltage)		
Frequency Range	40Hz~70 Hz				46~54Hz◎50Hz / 56~64Hz◎60Hz		46~54Hz◎50Hz / 56~64Hz◎60Hz		
Phase	Single phase with ground						3-phase with neutral and ground		
Power Factor	≥ 0.95				≥ 0.99 @ 100%load		≥ 0.99 @ 100%load		
OUTPUT									
AC Voltage Regulation (Batt. Mode)	± 3%				± 1%		± 1%		
Frequency Range (Synchronized Range)	47.5~52.5 Hz or 57~63 Hz				46~54 Hz◎50 Hz / 56~64 Hz◎60Hz		46~54Hz◎50Hz / 56~64Hz◎60Hz		
Frequency Range (Batt. Mode)	50 Hz ± 0.25 Hz or 60Hz ± 0.3 Hz				50 Hz ± 0.1 Hz or 60 Hz ± 0.1 Hz		50 / 60Hz ± 0.1 Hz		
Current Crest Ratio	3:1				3:1		3:1		
Harmonic Distortion	≤ 3 % THD (Linear Load) ≤ 6 % THD (Non-linear Load)		≤ 4 % THD (Linear Load) ≤ 7 % THD (Non-linear Load)		≤ 2 % THD (Linear Load) ≤ 6 % THD (Non-linear Load)		≤ 2 % THD (Linear Load) ≤ 6 % THD (Non-linear Load)		
Transfer Time	AC Mode to Batt. Mode	Zero						Zero	
	Inverter to Bypass	4 ms (Typical)				Zero		Zero	
Waveform (Batt. Mode)	Pure sine wave								
EFFICIENCY									
AC Mode	85%		88%		88%		89%		
Battery Mode	83%				88%		88%		
BATTERY									
Standard Model	Battery Type	12 V / 7 Ah	12 V / 9 Ah	12 V / 7 Ah	12 V / 9 Ah	12 V / 7 Ah	12 V / 9 Ah	12 V / 9 Ah	
	Numbers	3	3	6	6	20	20	40	
	Typical Recharge Time	4 hours recover to 90% capacity				7 hours recover to 90% capacity	9 hours recover to 90% capacity		
	Charging Current (max.)	1.0 A				1.0 A		1A	2A
	Charging Voltage	41.0 VDC ± 1%		82.1 VDC ±1%		273.0 VDC		273.0 VDC	
Long-run Model	Battery Type	Depending on the capacity of external batteries							
	Numbers	Depending on the capacity of external batteries							
	Charging Current (max.)	8.0 A				4.0 A		4A	8A
	Charging Voltage	41.0 VDC ± 1%		82.1 VDC ±1%		273.0 VDC		273.0 VDC	
INDICATORS									
LCD Display	UPS status, Load level, Battery level, Input/Output voltage, Discharge timer, and Fault conditions								
ALARM									
Battery Mode	Sounding every 4 seconds								
Low Battery	Sounding every second								
Overload	Sounding twice every second								
Fault	Continuously sounding								
PHYSICAL									
Standard Model	Dimension,DXWXH (mm)	397 x 145 x 220		421 x 190 x 318		592 x 250 x 576		592 x 250 x 576	862 x 250 x 826
	Net Weight (kgs)	13.18		28.1		81	83	83	139
Long-run Model	Dimension,DXWXH (mm)	397 x 145 x 220		421 x 190 x 318		592 x 250 x 576		592 x 250 x 576	592 x 250 x 576
	Net Weight (kgs)	6.86		12.93		22	24	24	37
ENVIRONMENT									
Operation Humidity	20-90 % RH @ 0- 40°C (non-condensing)								
Noise Level	Less than 45dBA @ 1 Meter				Less than 55dBA @ 1 Meter	Less than 58dBA @ 1 Meter		Less than 60dBA @ 1 Meter	
MANAGEMENT									
Smart RS-232	Supports Windows* family, Novell, Linux and FreeBSD								
USB	Supports Windows* family, Novell, Linux and FreeBSD								
Optional SNMP	Power management from SNMP manager and web browser								

* L means long-run model

