


Ideal for enterprise, small office and residential application

- 1xWAN,1xLAN,1xFXS,1xPSTN lifeline
- Auto-provision via TFTP, FTP and HTTP
- 3 SIP user accounts

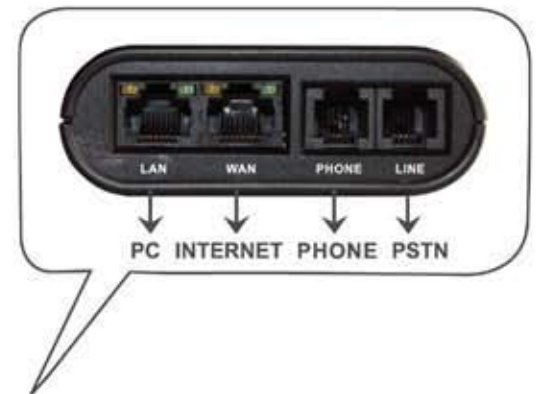

Yealink SIP-GW3CM is a next generation IP communication solution with complete functions and high performance-price ratio. It is a voice, fax, internet data and PSTN "all-in-one" integrated access device, enabling feature-rich telephone services and features over internet connection.

Its elegant and fashionable design, high-level voice quality, 3 SIP accounts availability can bring customers unlimited convenience and content of IP communication.

Network Protocol

SIP v1(RFC2543), v2(RFC3261)
IP/TCP/UDP/RTP/RTCP/SDP
IP/ICMP/ARP/RARP/SNTP
TFTP Client/DHCP Client/PPPoE Client
Telnet/HTTP Server
DNS Client
NAT/DHCP Server
ToS field

Voice Feature

G.711, G.723.1, G.726
G.729A, G.729B
VAD, CNG, LEC
Packet Loss Compensation
Adaptive Jitter Buffer

SIP Server

Registrar Server: 3 SIP account
Outbound Proxy

Configuration

Web Browser
Console/Telnet
Keypad
Auto-Provision

Firmware Upgrade

TFTP
Console
HTTP
Auto-Provision

Call Function

Call Hold
Call Waiting
Call Transfer
Call Forward
Caller ID
3-way conference

Phone Function

Volume Adjustment
Speed dial key
Phone Book
Redial
Flash

Dial Method

Direct IP call without SIP proxy
Dial number via SIP server
Dial URL via SIP Server

DTMF Function

In-Band DTMF
Out-of-Band DTMF
SIP Info

IP Assignment

Static IP
DHCP
PPPoE

NAT Traversal

STUN
UPnP

Security

HTTP 1.1 basic/digest
authentication for Web setup
MD5 for SIP authentication
(RFC 2069/RFC 2617)

Physical Features

Interface:2xRJ45 10/100M Base-T
1xFXS port, 1xPSTN lifeline
Power adaptor:Input:AC 100~240V
Output:DC 12V/0.5A
Product:130x80x28MM
Operating humidity:10~95%
LED:Status,PSTN,VoIP
Storage temperature:Up to 60 C
Carton Meas:470x450x168MM
N.W/CTN:9.3Kg
G.W/CTN:9.9Kg
Qty/CTN:20pcs

Certifications

